



Specially produced connectors for post to beam connections. The PC extension side plates function as tie straps where splices occur. EPC option should be used where the beam ends at the post.


FEATURES

Material

- Pre-galvanised mild steel.

Benefits

- make the connection simple and fast

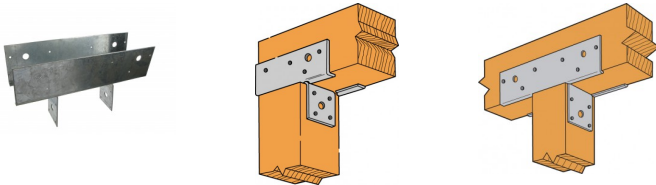

APPLICATIONS

Header member

- Solid sawn timber and Glulam timber.

Field of use


- Raised floors and terraces.

TECHNICAL DATA


Fixings & SWLs

References	Dimensions [mm]							Fasteners			Safe Working Loads [kN]	
	A	B	C	D	E	F	Thick.	Post	Beam	Specification	Short Term	
											Uplift	Lateral
PC44	90	89	67	95	91	280	2.5	8	12	4.0 x 90	6.18	4.11
EPC44	90	89	67	95	91	186	2.5	8	8	4.0 x 90	6.18	4.76

INSTALLATION

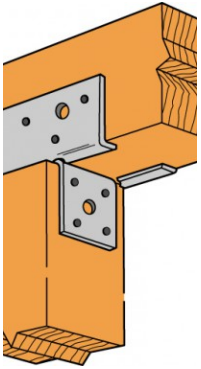

EPC Beam
to column
connection



PC Beam
to column
connection